


Butterfly 4ca



With low impedance output
and 70/100V outputs



Dimensions(W×H×D): 215×122×165mm

Specifications

Low Z Power	60W
High Z Power	70V:2.5W/5W/10W/20W 100V:5W/10W/20W/x
Frequency Response(-10dB)	100Hz-20kHz
Horizontal Coverage	100°
Vertical Coverage	20°
Maximum Calculated SPL/1M(Continuous/Peak)	111dB/117dB
HF	2x1" driver
LF	4" driver, 1" voice coil
Impedance	16Ω
Crossover Mode	Passive Crossover
Input Connectors	All-weather protective connector
Cabinet Material	ABS plastic material
Angle adjustment	0°, 4°
Cabinet Color	Metal gray
Grille	Aluminium mesh
Mesh Color	Metal gray is standard and default color, Contact Audiocenter for customization
Pole Mount	M10
Speaker Dimensions(W×H×D)	215x122x165mm
Carton Dimensions(W×H×D)	253x160x247mm
Net Weight	2.5kg
Shipping Weight	2.9kg
Technical Support and After-sales Service	Global application support team, EASE GLL Files

Product Overview

Butterfly 4ca consists of 1 pc 4-inch LF driver and 2 pcs soft dome tweeters. The HF have an exclusive T-EYE™ design, and the array layout is assembled in the center front of the speaker. The speaker has a wider frequency response and large near-field coverage, and the sound is especially defined and delicate.

Butterfly 4ca also have a modular design concept, which can be used individually or in combination with multiple speakers. It has good scalability and can flexibly adapt to various environments and applications.

Butterfly 4ca is available both in High Impedance (70V/100V) and Low Impedance (16Ω).

70V: 2.5W/5W/10W/20W

100V: 5W/10W/20W/x

System Configuration

- Artist T2.4V/T4.4V Amplifier
- BrainCore CU

Back Panel




⦿ High Z and Low Z

High impedance (70V/100V) and low impedance (16 Ohm) available

70V : 2.5W/5W/10W/20W

100V: 5W/10W/20W/x

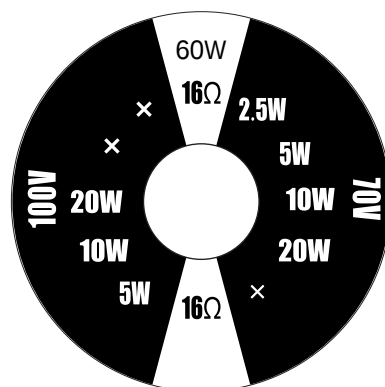


Accessories



Wall Mount / Monitor Bracket
(Standard accessory packed with the speaker)

Dimension (WxHxD):
117x55x141mm



Single Wall Mount

Monitor



Hanging Frame

Dimension (WxHxD):
205x30.5x164.5mm



Line array system



Wall Mount Bracket

Dimension (WxHxD):
205x100x339mm




Wall-mount in distributed sound install




Pole Mount Bracket


Dimension (WxHxD):
205x92.5x164.5mm

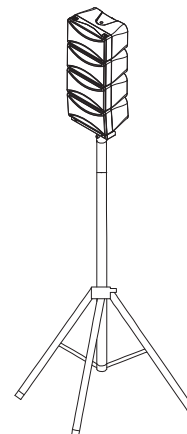

Tripod Pole Mount

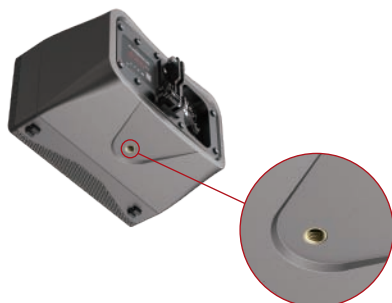

Cabinet built-in M10 hole



Mount with Microphone Stand